


OPERATION:

AL Series Indicators provide two color visual indication of the presence and absence of air or non-aggressive gas in a system. They are available in a variety of color combinations. The color changes when pressure is applied and/or removed via the Control Port. A special Lens configuration provides for 180° viewing of indicator status. Units are easily panel mounted.

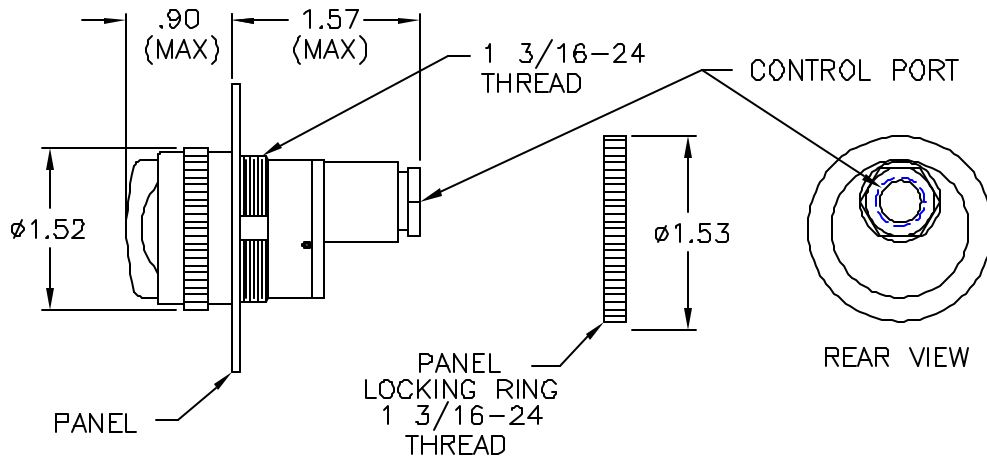

HOW TO ORDER: (Example AL15RG)

AL	15	RG
PRODUCT SERIES		REFLECTOR COLORS
AL Pneumatic Indicator		RG — Red/Green
		GR — Green/Red
		GBK — Green/Black
		BKG — Black/Green
		RBK — Red/Black
		BKR — Black/Red
		YBK — Yellow/Black
		BKY — Black/Yellow
		ABK — Amber/Black
		BKA — Black/Amber
		AG — Amber/Green
		GA — Green/Amber
		BKW — Black/White
		WBK — White/Black
		GW — Green/White
		WG — White/Green

FEMALE THREAD
PORT CONNECTIONS

15 = 1/8 NPT (thread)
19 = 10-32 (thread)

TECHNICAL SPECIFICATIONS:

OPERATING PRESSURE:
20 to 120 PSI

MOUNTING HOLE: (inches $\pm .015$)
1 13/16 Dia (1.203 Dia)

TEMPERATURE RANGE:
35°F to 150°F

MATERIALS:
Lens — Acrylic
Lens Ring — ABS
Housing — Acetal & ABS
Seals — Buna N & Silicone
Fitting — Brass
Internal — Stainless Steel
Acetal
ABS
Polycarbonate

MEDIA:
Air or non-aggressive gas

WEIGHT:
1.3 ounces

NOTE: First color specified in the model number is for the un-pressurized state.

ELLIS/KUHNKE CONTROLS					
DRAWN BY	EJL	8/22/02	AL SERIES		
CHECKED			PNEUMATIC INDICATOR		
ISSUED			SIZE	FSCM NO.	DWG. NO.
			B		AL-SERIES
					SHEET