


CAUTION: DO NOT OVER TIGHTEN DURING ASSEMBLY OF MATING FITTING.

TECHNICAL DATA:

OPERATING PRESSURE RANGE - 7.5 TO 30 PSI  
 MAXIMUM COUNT SPEED - 10 CPS (CYCLES PER SECOND)  
 OPERATING TEMPERATURE RANGE - 32°F TO 140°F  
 WEIGHT - 3.3 OUNCES  
 COLOR - CASE (BLACK), LETTERS (WHITE)  
 DIGIT SIZE - .16 INCH (4mm)  
 DUTY CYCLE - CONTINUOUS (MIN. PULSE DURATION 8ms)  
 (MIN PAUSE DURATION 10ms)  
 MEDIA - FILTERED AIR OR NONAGGRESSIVE GAS NON-LUBRICATED

NOTE: 1 - PRESSURE MUST DROP TO 0 PSI BETWEEN PULSES  
 2 - DO NOT LUBRICATE (DEVICE IS SELF LUBRICATING)

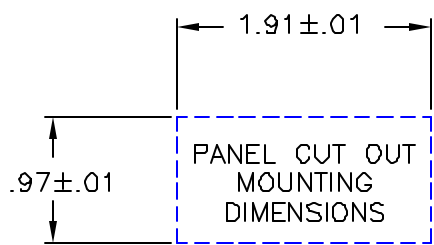

HOW TO ORDER: AVAILABLE IN THE FOLLOWING MODELS

LPM1620 = NON-RESET MODEL  
 LPM1621 = MANUAL PUSH BUTTON RESET  
 LPM1621V = P.B. RESET WITH RESET GUARD

<b>ELLIS/KUHNKE CONTROLS</b>					
DRAWN BY	EJL	8/15/02	6 - DIGIT LPM COUNTER LOCKING SPRING VERSION		
CHECKED			SIZE	FSC#	DWG. NO.
ISSUED			B		LPM162*
			SCALE	4:1	SHEET