


CAUTION: DO NOT OVER TIGHTEN DURING ASSEMBLY OF MATING FITTING.

TECHNICAL DATA:

OPERATING PRESSURE RANGE - 25 TO 100 PSI
 MAXIMUM COUNT SPEED - 10 CPS (CYCLES PER SECOND)
 OPERATING TEMPERATURE RANGE - 32°F TO 140°F
 WEIGHT - 3.3 OUNCES
 COLOR - CASE (BLACK), LETTERS (WHITE)
 DIGIT SIZE - .16 INCH (4mm)
 DUTY CYCLE - CONTINUOUS (MIN. PULSE DURATION 8ms)
 (MIN PAUSE DURATION 10ms)
 MEDIA - FILTERED AIR OR NONAGGRESSIVE GAS NON-LUBRICATED

NOTE: 1 - PRESSURE MUST DROP TO 4.4 PSI MAX. BETWEEN PULSES
 2 - DO NOT LUBRICATE (DEVICE IS SELF LUBRICATING)

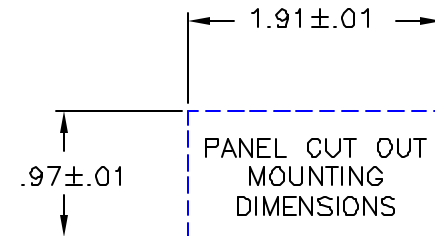

HOW TO ORDER: AVAILABLE IN THE FOLLOWING MODELS

PM1620 = NON-RESET MODEL
 PM1621 = MANUAL PUSH BUTTON RESET
 PM1621V= P.B. RESET WITH RESET GUARD

| | | | | | |
|------------------------------|-----|---------|--|------|----------|
| ELLIS/KUHNKE CONTROLS | | | | | |
| DRAWN BY | EJL | 8/15/02 | 6 - DIGIT PM COUNTER LOCKING SPRING VERSION | | |
| CHECKED | | | | | |
| ISSUED | | | SIZE | FSC# | DWG. NO. |
| | | | B | | PM162* |
| | | | SCALE | 4:1 | SHEET |