


CAUTION: DO NOT OVERTIGHTEN
DURING ASSEMBLY OF
MATING FITTING.

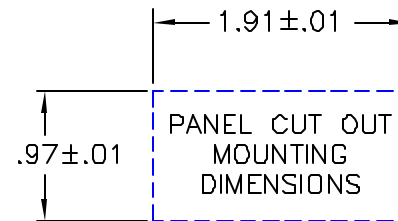

TECHNICAL DATA:

OPERATING PRESSURE RANGE - 25 TO 100 PSI
 MAXIMUM COUNT SPEED - 10 CPS (CYCLES PER SECOND)
 OPERATING TEMPERATURE RANGE - 32°F TO 140°F
 WEIGHT - 3 OUNCES
 COLOR - CASE (BLACK), LETTERS (WHITE)
 DIGIT SIZE - .16 INCH (4mm)
 DUTY CYCLE - CONTINUOUS (MIN. PULSE DURATION 8ms)
 (MIN. PAUSE DURATION 10MS)
 MEDIA - FILTERED AIR OR NONAGGRESSIVE GAS NON-LUBRICATED

NOTE: 1 - PRESSURE MUST DROP TO 4.4 PSI MAX BETWEEN PULSES
 2 - DO NOT LUBRICATE (DEVICE IS SELF LUBRICATING)

HOW TO ORDER: AVAILABLE IN FOLLOWING MODEL
 PM1810 = NON RESET MODEL ONLY

ELLIS/KUHNKE CONTROLS

DRAWN BY	EJL	B/19/02	8 - DIGIT PM COUNTER LOCKING SPRING VERSION	
CHECKED			SIZE	FSC#
ISSUED			B	PM1820
			DWG. NO.	SHEET